


size
7 1/4
22.8in.

Westernhat 2
brim
interfacing(heavy
two sheets

size
7 1/4
22.8in.

Westernhat
top
interfacing(heavy weight
one sheets

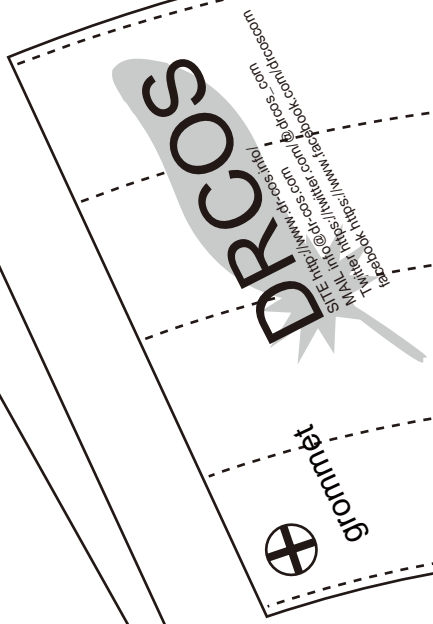

Bonding line AA

Bonding line AA

...n hat 2
...heavy weight)
...sheets

Bonding line AA

size
7 1/4
22.8in.


DRCOS

SITE <http://www.dr-cos.info/>
MAIL info@dr-cos.com
Twitter https://twitter.com/@drcos_com
facebook <https://www.facebook.com/drcoscom>



Westernhat 2
Top
two sheets

Seam allowance 1/2in.

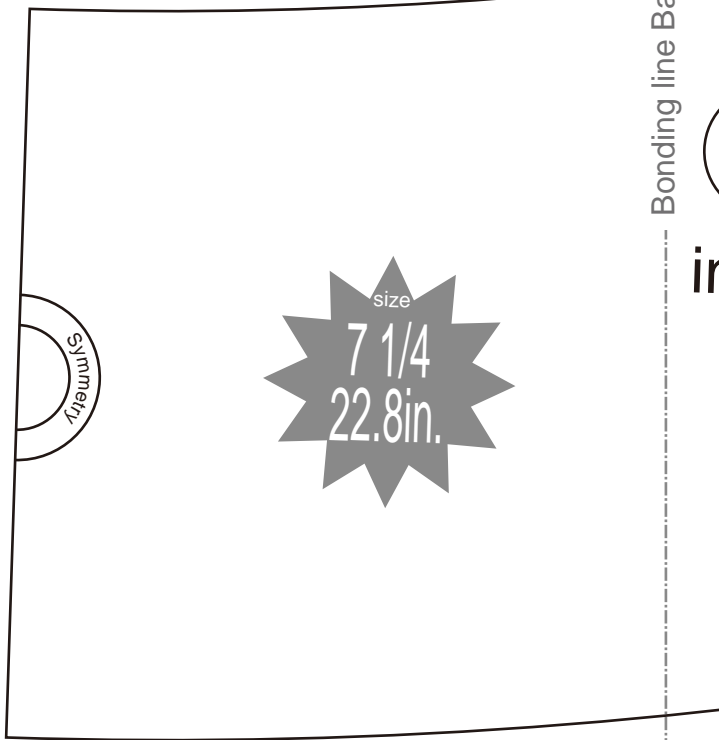

size
7 1/4
22.8in.

Bonding line Ba

Bonding line AB

Bonding line Aa
Westernhat 2
top
weight)



Grain Line

Seam allowance 1/2in.

Westernhat 2
brim
four sheets

Bonding line BA

Bonding line Ab



Bonding line BA

bias & wire


DRCOS

SITE <http://www.dr-cos.info/>
MAIL info@dr-cos.com
Twitter https://twitter.com/dr-cos_com
facebook <https://www.facebook.com/drcoscom>

DRCOS

SITE <http://www.dr-cos.info/>
MAIL info@dr-cos.com
Twitter https://twitter.com/dr-cos_com
facebook <https://www.facebook.com/drcoscom>

Bonding line Ba



Westernhat 2
side

interfacing (heavy weight)
one sheets


Bonding line Bb

1/4 in.


Bonding line BB

DRCOS

SITE <http://www.dr-cos.info/>
MAIL info@dr-cos.com
Twitter https://twitter.com/dr-cos_com
facebook <https://www.facebook.com/drcoscom>



**Westernhat 2
side
two sheets**

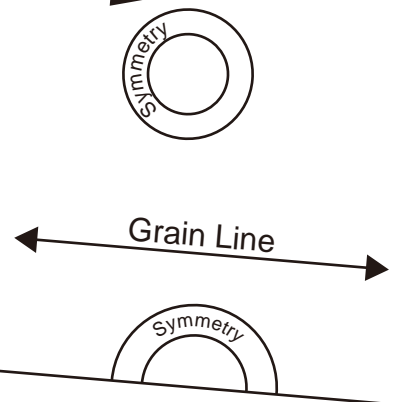

How to make

Sorry if I haven't made myself understood (well) in English. You know I'm poor at English.

1. iron on the interfacing (heavy weight) to "top" "side" "brim"
2. "side" is sew up and loop
3. "top" and "side" sew pieces
4. "brim" is sew up and loop
5. The surface and the back are same.
6. two "brims" are sewn up by a dotted line.
7. In a "brim", bias (A wire is put in.)
8. "side" "brim" is sewn up.
9. grommet is installed in the grommet location.
10. to pass a string through a hole.

Seam allowance 1/2in.